




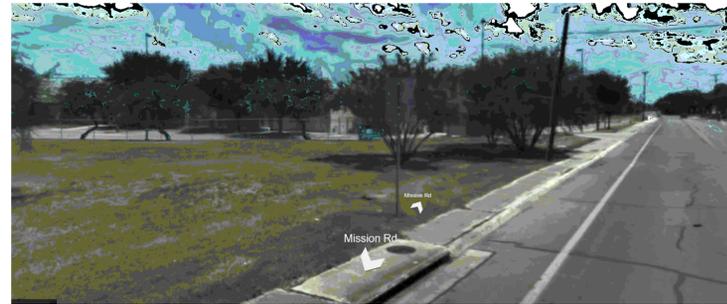

LOT PICS

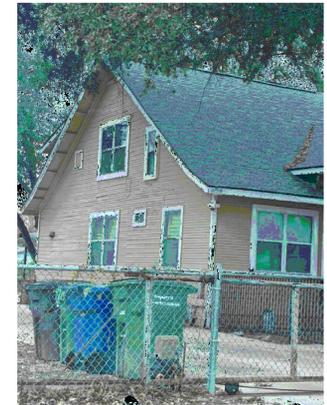

ADJACENT BUILDINGS PICS

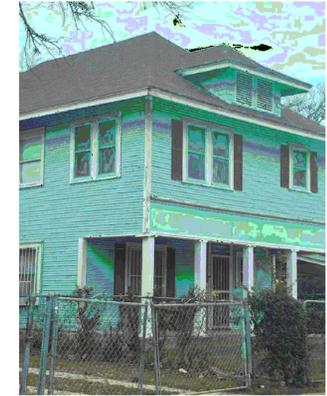

PRECEDENTS @ THE MISSIONS

2509 RESIDENCES
2509 MISSION RD SAN ANTONIO TX

LIS ARCHITECTURAL DESIGN SERVICES
(210) 365-9055
LISARCHITECTURALDESIGNSERVICES.COM

DATE
8/29/2025

REVISION HISTORY
Mark Note

The Designer, Brenda Perez or Lis Architectural Design Services, assume no liability for any structure built from these plans. Before construction, the purchaser, builder or contractor must verify all dimensions, verify compliance with all building codes and incorporate site conditions. Only a qualified designer, architect or structural engineer should be permitted to alter these plans with consent of owner.

sheet

P.1



MISSION RD STREET VIEW
Scale: 1/4" = 1'-0"



GREEN AREA GREEN AREA NEW DEVELOPMENT LOT 11 GREEN AREA

MISSION RD STREET VIEW

GENERAL NOTES DESIGNER: IRC

THESE DOCUMENTS ARE THE PROPERTY OF THE DESIGNER AND SHALL NOT BE COPIED, DUPLICATED, ALTERED, MODIFIED OR REVISED IN ANY WAY WITHOUT THE EXPRESSED WRITTEN APPROVAL OF THE DESIGNER.

CONTRACTOR SHALL VERIFY ALL CONDITIONS AND DIMENSIONS AT THE SITE AND ALL INCONSISTENCES SHALL BE BROUGHT TO THE ATTENTION OF THE DEVELOPER AND THE DESIGNER BEFORE PROCEEDING WITH WORK.

ANY ERRORS OR OMISSIONS FOUND IN THESE DRAWINGS SHALL BE BROUGHT TO DEVELOPERS AND DESIGNERS ATTENTION IMMEDIATELY.

DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS.

ALL DIMENSIONS ARE TO FACE OF STUD OR TO FACE OF FRAMING UNLESS OTHERWISE NOTED.

ALL TRUSS DRAWINGS TO BE REVIEWED AND APPROVED BY THE STRUCTURAL ENGINEER PRIOR TO ISSUANCE OF BUILDING PERMIT.

ALL OR EQUAL SUBSTITUTIONS MUST BE SUBMITTED TO AND APPROVED BY CITY BUILDING OFFICIAL PRIOR TO INSTALLATION.

ALL ANGLED PARTITIONS ARE 45 OR 30 DEGREES UNLESS OTHERWISE NOTED.

PROVIDE FIREBLOCKING. (PER IRC SECTION R602.8)

ALL ELECTRICAL AND MECHANICAL EQUIPMENT AND METERS ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS, CONTRACTOR TO VERIFY.


THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR ALL WORK AND MATERIALS REPRESENTED ON THESE DOCUMENTS INCLUDING THE WORK AND MATERIALS FURNISHED BY SUBCONTRACTORS AND VENDORS.

ALL WORK PERFORMED BY THE GENERAL CONTRACTOR SHALL COMPLY AND CONFORM WITH LOCAL AND STATE BUILDING CODES, ORDINANCES AND REGULATIONS, ALONG WITH ALL OTHER AUTHORITIES HAVING JURISDICTION. THE GENERAL CONTRACTOR IS RESPONSIBLE TO BE AWARE OF THESE REQUIREMENTS AND GOVERNING REGULATIONS.

ELASTOMERIC SHEET WATERPROOFING: FURNISH AND INSTALL ALL WATERPROOFING COMPLETE. A 40 MIL. SELF-ADHERING MEMBRANE OF RUBBERIZED ASPHALT INTEGRALLY BONDED TO POLYETHYLENE SHEETING, OR EQUAL. INSTALL PER MANUFACTURER'S AND TRADE ASSOCIATION'S PRINTED INSTALLATION INSTRUCTIONS. 6" MINIMUM LAP AT ALL ADJACENT WALL SURFACES.


LEGAL DESCRIPTION

A 0.0837 ACRE (3,646 SQUARE FEET) STRIP OF LAND OUT OF LOTS 8, 9, 10 AND 11, BLOCK 14, NEW CITY BLOCK 7718, KELLY FERRIS MHP HARLANDALE ADDITION TO THE CITY OF SAN ANTONIO, BEXAR COUNTY, TEXAS, ACCORDING TO THE MAP OR PLAT THEREOF RECORDED IN VOLUME 105, PAGE 280, DEED AND PLAT RECORDS, BEXAR COUNTY, TEXAS, AND BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS ATTACHED HERETO.

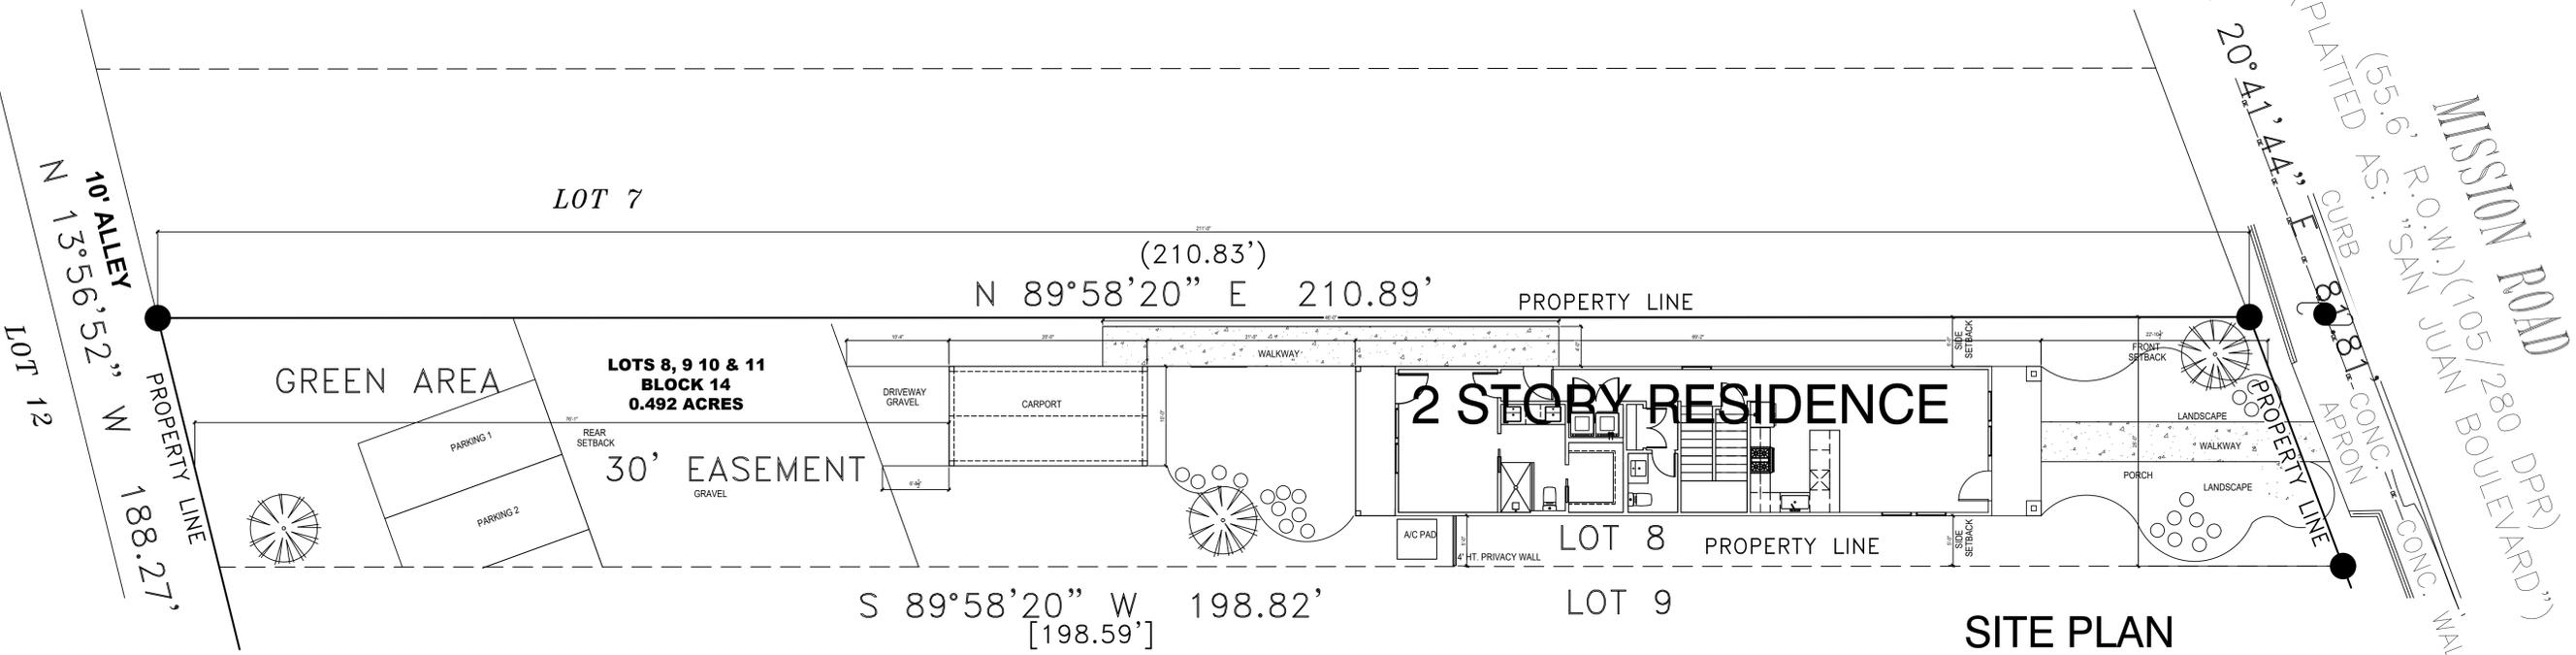

SITE PLAN


scale: 1/8" = 1'-0"

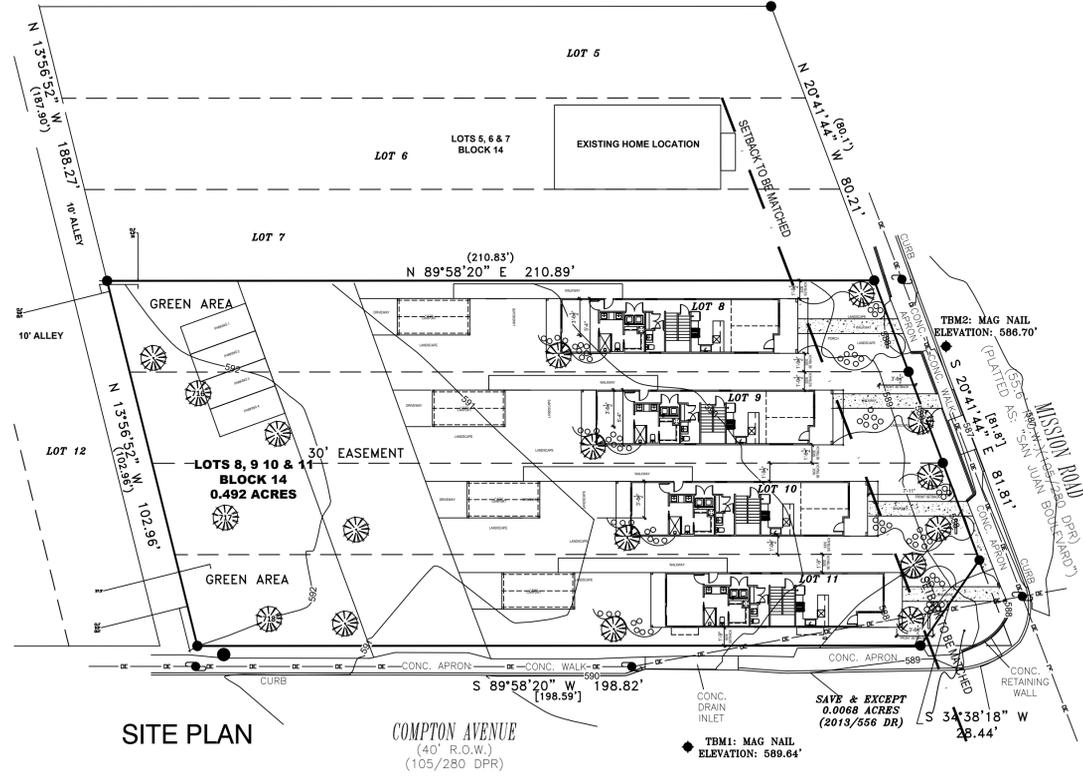

SITE PLAN

COMPTON AVENUE
(40' R.O.W.)
(105/280 DPR)

IMPERVIOUS COVERAGE CALCULATIONS	
TOTAL SQUARE FOOTAGE OF BUILDING COVERAGE	1,543 SQ FT
TOTAL SQUARE FOOTAGE OF CONCRETE DRIVEWAY	129 SQ FT
TOTAL SQUARE FOOTAGE OF IMPERVIOUS COVERAGE	1,672 SQ FT
IMPERVIOUS (WALKWAY)	296 SQ FT
TOTAL IMPERVIOUS AREA	1,968 SQ FT
A LOT MEASURING 5,559 SQ. FT. WITH A 30% COVERAGE WOULD HAVE AN ALLOWABLE MAXIMUM BUILDING COVERAGE OF 1,667 SQ. FT.)	
A LOT MEASURING 5,559 SQ. FT. WITH A 45% COVERAGE WOULD HAVE AN ALLOWABLE MAXIMUM BUILDING COVERAGE OF 2,501 SQ. FT.)	

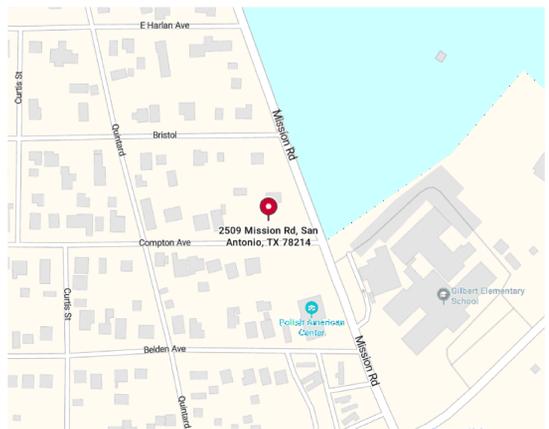

LOCATION MAP



PRIVADA AT THE MISSIONS
 LOT -8 2509 MISSION RD SAN ANTONIO TX



LIS ARCHITECTURAL DESIGN SERVICES
(210) 365-9055
LISARCHITECTURALDESIGNSERVICES.COM

LOT 8

DATE
2/2/2026

REVISION HISTORY
Mark Note

Mark	Note


The Designer, Brenda Perez or Lis Architectural Design Services, assume no liability for any structure built from these plans. Before construction, the purchaser, builder or contractor must verify all dimensions, verify compliance with all building codes and incorporate site conditions. Only a qualified designer, architect or structural engineer should be permitted to alter these plans with consent of owner.

sheet

G.1

SITE AND DEVELOPMENT PLAN

LOT 8

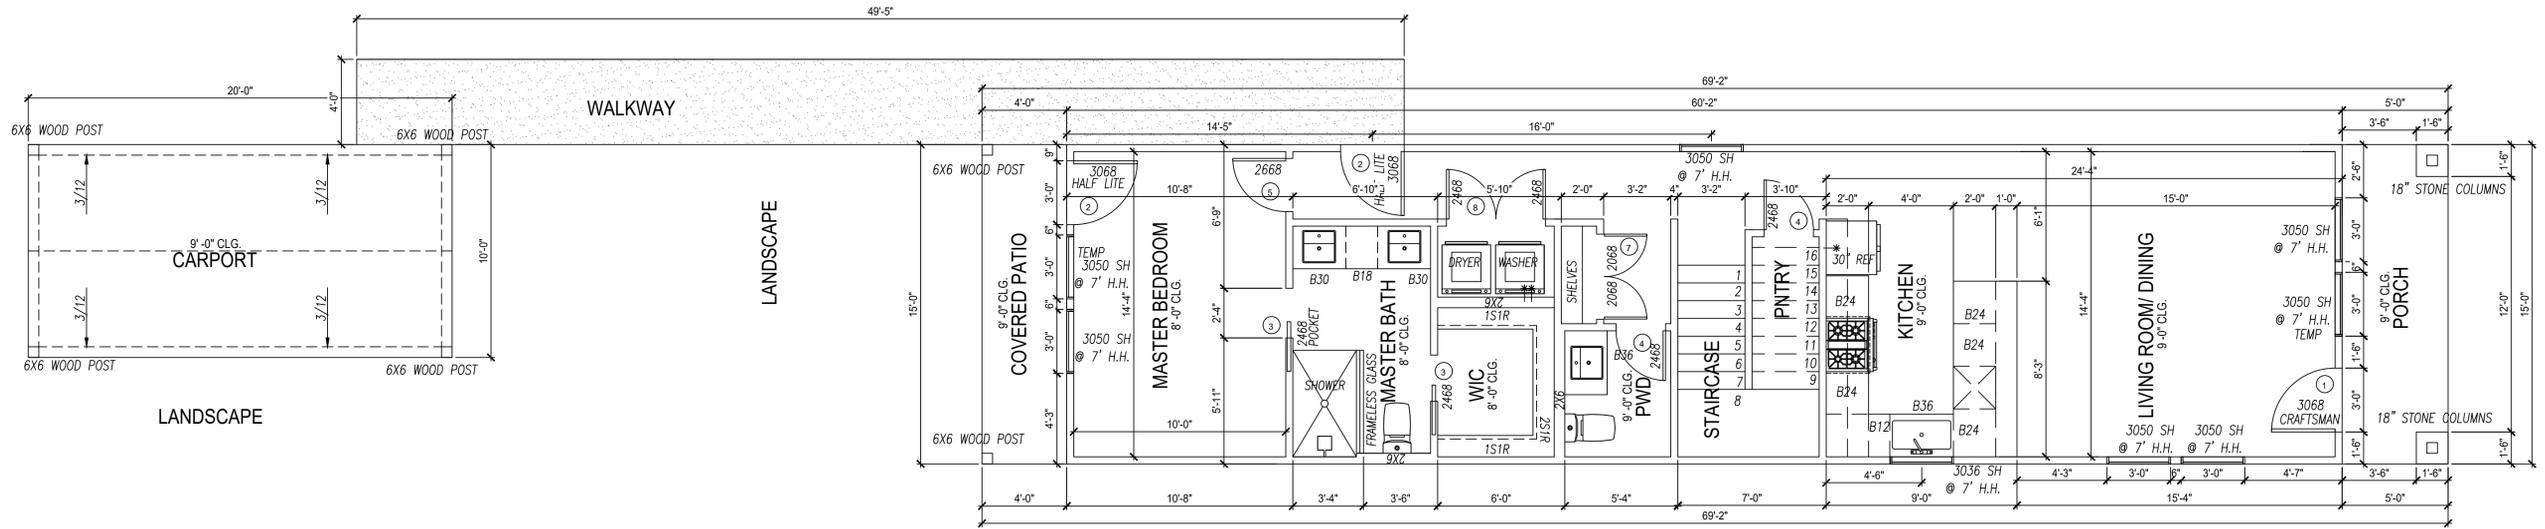


TOTAL SQ FT AREAS	
FIRST FLOOR LIVING AREA SQ FT.....	903 SQ FT
SECOND FLOOR LIVING AREA SQ FT.....	592 SQ FT
TOTAL LIVING AREA.....	1,495 SQ FT
FRONT PORCH.....	75 SQ FT
PATIO.....	60 SQ FT
TOTAL CONSTRUCTION.....	1,630 SQ FT

2024 IRC CODE COMPLIANCE
 ALL PLANS TO COMPLY WITH THE 2024 INTERNATIONAL RESIDENTIAL CODE FOR ONE AND TWO FAMILY DWELLINGS. WHERE PLAN CONTRADICTIONS OCCUR THE 2024 IRC CODE SHALL PREVAIL UNLESS LOCAL BUILDING CODES DICTATE



FIRST FLOOR

scale : 1/4" = 1'-0"

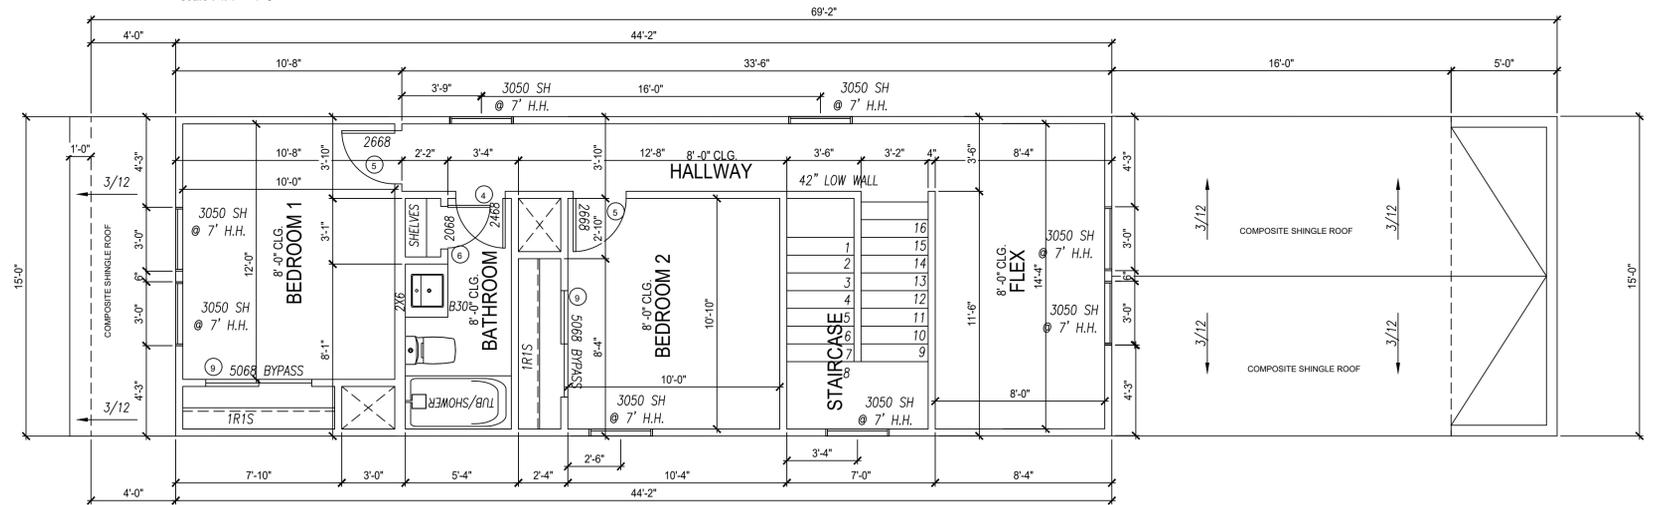

SECOND FLOOR

scale : 1/4" = 1'-0"

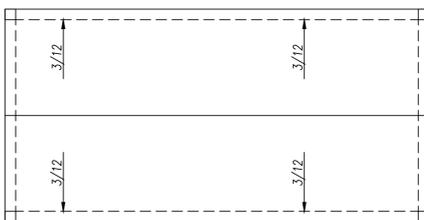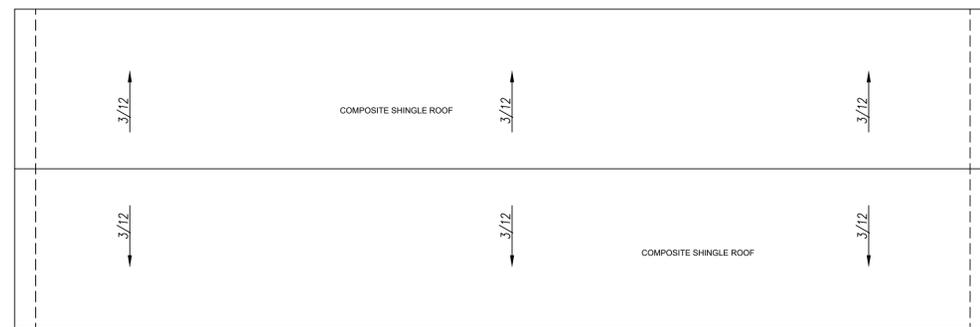

CARPOT ROOF PLAN

scale : 1/4" = 1'-0"

ROOF PLAN

scale : 1/4" = 1'-0"

ROOF AREA SECOND FLOOR:
 739 SQ FT
 REQUIRED VENTILATION: 1,086 SQ FT / 150 : 4.9 SQ FT
 116 SQ FT X 144 SQ IN/SQ FT: 1,670.56 SQ IN
 PROVIDED VENTILATION (2) POWER VENTS (PROVIDING)
 1,000 SQ IN = 2,000 SQ IN

*** 2,000 SQ IN PROVIDED - 1,670 SQ IN REQUIRED

PRIVADA AT THE MISSIONS
 LOT -8 2509 MISSION RD SAN ANTONIO TX



LIS ARCHITECTURAL DESIGN SERVICES
 (210) 385-1955
 LISARCHITECTURALDESIGNSERVICES.COM

LOT 8

DATE
 2/2/2026



REVISION HISTORY
 Mark Note

REVISION HISTORY	Mark	Note


The Designer, Brendalis Perez or Lis Architectural Design Services, assume no liability for any structure built from these plans. Before construction, the purchaser, builder or contractor must verify all dimensions, verify compliance with all building codes and incorporate site conditions. Only a qualified designer, architect or structural engineer should be permitted to alter these plans with consent of owner.

sheet


A.1

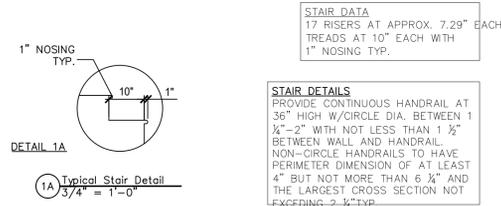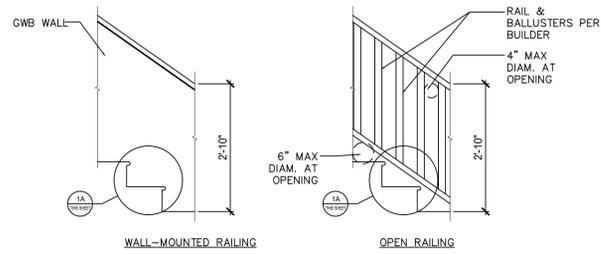


TYPICAL STAIR DETAILS
scale : NTS

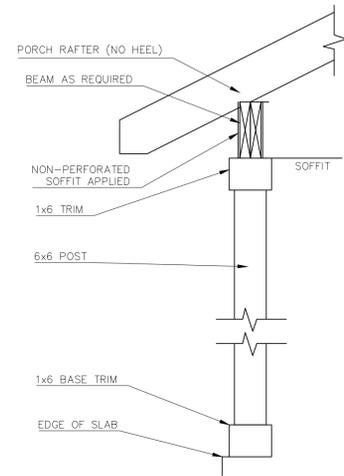


TYPICAL PORCH COLUMN DETAIL
scale : NTS

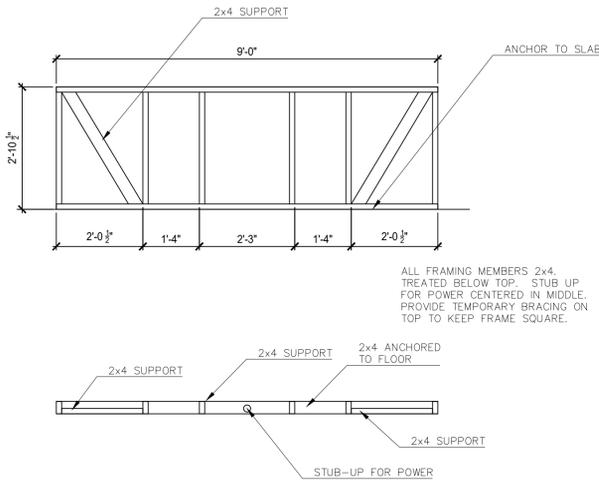


ISLAND FRAMING DETAIL
scale : 1/4" = 1'-0"

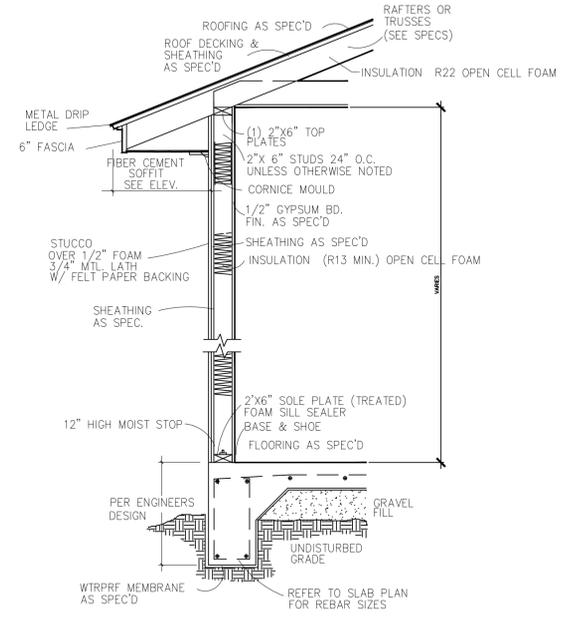


TYPICAL WALL SECTION STUCCO WALL
SCALE: 1/2" = 1'-0"

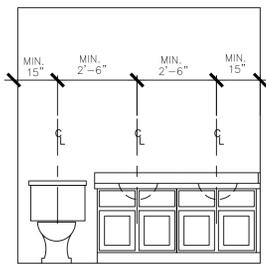


DRAIN SPACING
scale : NTS

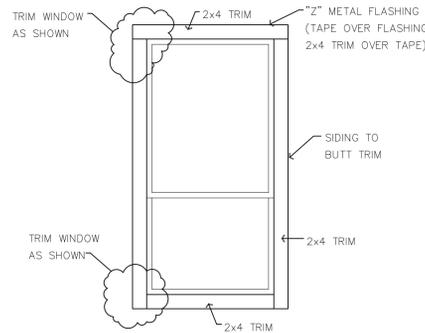


WINDOW TRIM DETAIL 1
scale : NTS

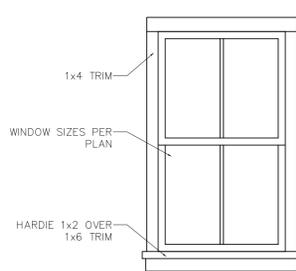


WINDOW TRIM DETAIL 2
scale : NTS

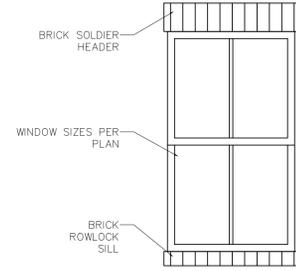


WINDOW TRIM DETAIL 3
scale : NTS

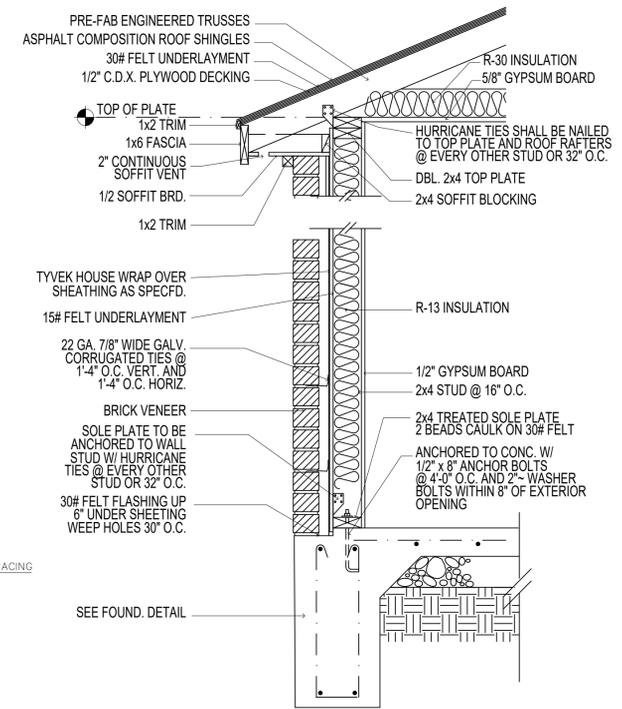


TYPICAL WALL SECTION BRICK WALL
SCALE: 1/2" = 1'-0"

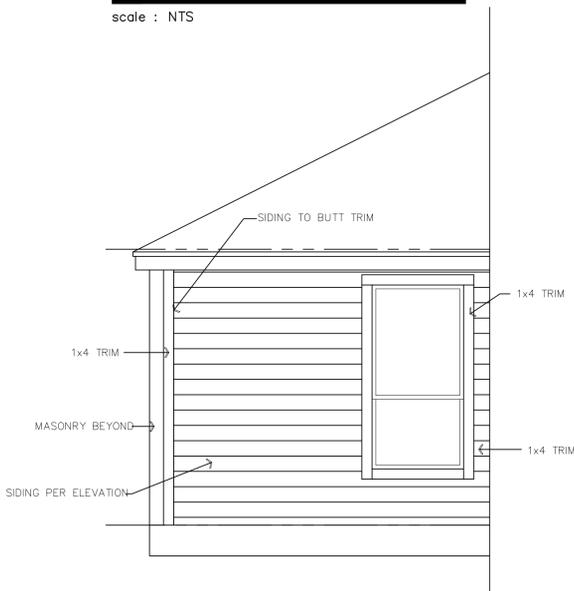


TYP. SIDING DETAIL
scale : NTS



HALF-WALL SECTION
scale : NTS



4x4 BRACKET DETAIL
scale : NTS

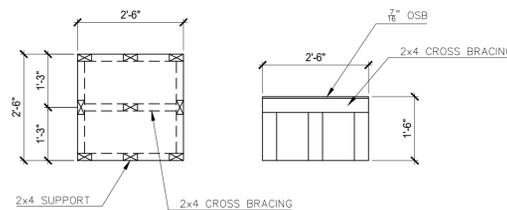

TYPICAL WATER HEATER STAND
scale : 1/8" = 1'-0"

PRIVADA AT THE MISSIONS
LOT -8 2509 MISSION RD SAN ANTONIO TX



LIS ARCHITECTURAL DESIGN SERVICES
(210) 385-9055
LISARCHITECTURALDESIGNSERVICES.COM

LOT 8

DATE
2/2/2026

REVISION HISTORY
Mark Note

REVISION HISTORY	Mark	Note











The Designer, Brenda Pineda or Lis Architectural Design Services, assume no liability for any structure built from these plans. Before construction, the purchaser, builder or contractor must verify all dimensions, verify compliance with all building codes and incorporate site conditions. Only a qualified designer, architect or structural engineer should be permitted to alter these plans with consent of owner.

sheet

A.6

LEGEND

- 1 NOTE: CARPET STRIP AT CENTRAL OF STAIR ONLY HARDWOOD EDGES. VERIFY DIMENSION AT SIDES
- 2 DOUBLE 2 X FLOOR JOISTS
- 3 PLYWOOD SUBFLOOR
- 4 FLOOR JOIST
- 5 2 X 6 BLOCKING
- 6 INTERIOR "ONE HOUR" RATED FINISH WHERE OCCURRING
- 7 NOTE: COVE MOLDING NOT SHOWN FOR CLARITY, BELOW NOSING, SEE DET. #1
- 8 1" LIP MAXIMUM
- 9 HARDWOOD FLOORING AND NOSING
- 10 2X FLOOR JOIST SEE FRAMING PLAN
- 11 2X STAIR STRINGER SEE PLAN
- 12 "SIMPSON" HU HANGER
- 13 2X12 STAIR STRINGERS AT 12" O.C. W/ ONE ADJUSCENT TO WALL TYPICAL EACH SIDE
- 14 CARPET TACK STRIP TOP AND BOTTOM AS REQUIRED TYPICAL
- 15 CARPET OVER PLYWOOD OR HARDWOOD VERIFY IN THE FIELD.
- 16 CUT PLYWOOD RISES OR TREADS, FASTEN TO 2X STAIR STRINGERS W/ GLUE AND DRYWOOD SCREWS
- 17 BRASS CARPET HOLD-DOWN TYPICAL AT INSIDE OF INSIDE BOTTOM OF EACH STEP
- 18 NOTE: ALLOW FOR FINISH ON PLYWOOD
- 19 CERAMIC TILE
- 20 BOND COAT
- 21 MORTAR BED: 3/4" MIN. - 1 1/4" MAX.
- 22 SCRATCH COAT
- 23 METAL LATH
- 24 WATERPROOF MEMBRANE DESIGN REQUIREMENTS
- 25 USE COVE TILE AT JUNCTION OF RISER AND TREAD FOR MAINTAINING QUARRY OR PAVER TILE. COVE SET HORIZONTALLY OR VERTICAL TO FACILITATE LAYOUT
- 26 FINISHED STEP NOSINGS ARE AVAILABLE IN SPECIALLY SHAPED QUARRY AND PAVER TILE PIECES
- 27 USE FULL RADIUS CERAMIC MOSAIC BULLNOSE TILE FOR NOSINGS
- 28 SLIP RESISTANT TILE REQUIRED ON STAIR TREADS TYPICALLY
- 29 ALTERNATE: EXTERIOR GRADE PLYWOOD RISER / TREAD
- 30 "SIMPSON" HU JOIST HANGERS DOUBLE BLOCKING TO FLOOR JOIST
- 31 NOTE: ALL PLYWOOD EXTERIOR GRADE TYPICAL 3/4" CDX
- 32 FINISH CONCRETE WITH MEDIUM ROUGH BRUSH.
- 33 HAMMER FINISH FREE OF CRACKS, WAXY OR OILY FILMS AND/OR CURING COMPOUNDS
- 34 LIGHT BROOM FINISH TYPICAL
- 35 3/4" RADIUS TOP AND BOTTOM TYP.
- 36 3/8" DIA. LAG BOLT
- 37 2X4 STUDS AT 16" O.C. TYPICAL (WALL)
- 38 INTERIOR FINISH
- 39 1 1/4" DIA. STD. PIPE HANDRAIL (VERIFY W/ OWNER, WOOD SIMS)
- 40 2X BLOCKING W/ 2 1/2" FH WD. SCREWS AT 4" O.C. TYPICALLY
- 41 TDD. SAFETY GROOVES STOP TOOLS 3" FROM EACH END OF TREAD AND GROOVES IF SCHED OR DET. CALLS FOR OTHERWISE
- 42 CAPPED END, WELD AND GRIND SMOOTH
- 43 METAL BRACKET
- 44 VERIFY WALL THICKNESS SEE PLANS
- 45 INTERIOR FINISH ONE HOUR RATED AT STAIR
- 46 ALT. INSULATE UNDER SIDE OF STAIRS W/ R-19 BATTS
- 47 SEE STRUCTURAL FOR SLAB THICKNESS AND REINFORCING
- 48 MOLDING
- 49 1 1/8" X 1 3/8" WOOD WALL STRINGER
- 50 3/4" PLYWOOD TREAD
- 51 BALLISTER DOVETAILED INTO TREAD
- 52 COVE MOLDING
- 53 2X12 STRINGERS AT 12" O.C. W/ 4-16d AT EACH STUD ALT. 3" USE DRYWALL SCREWS
- 54 1 1/2" OUTER FINISH WOOD STRINGER
- 55 INSULATE STAIR WALLS W/ R-11 SOUND BATTS
- 56
- 57
- 58

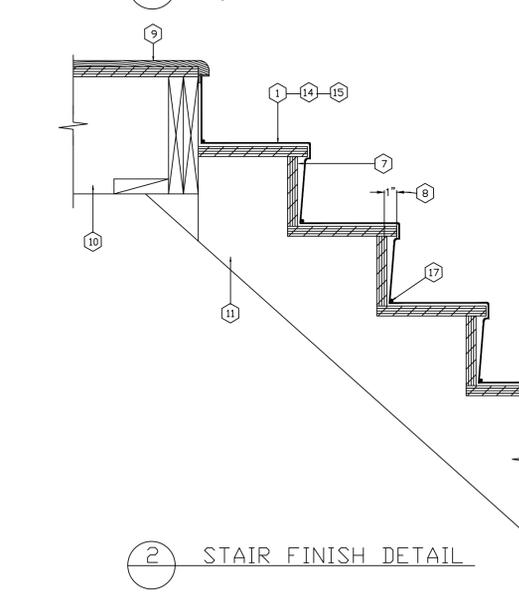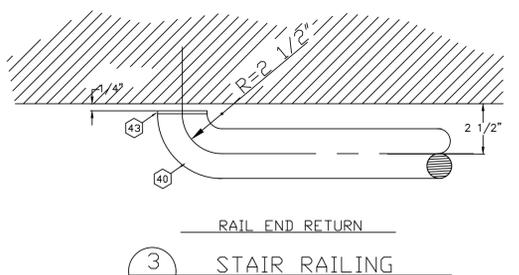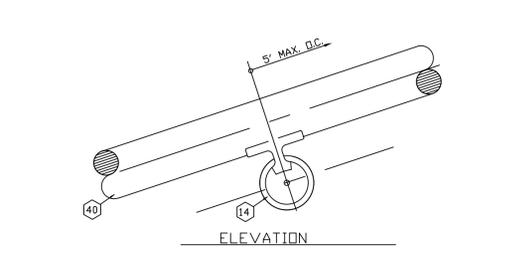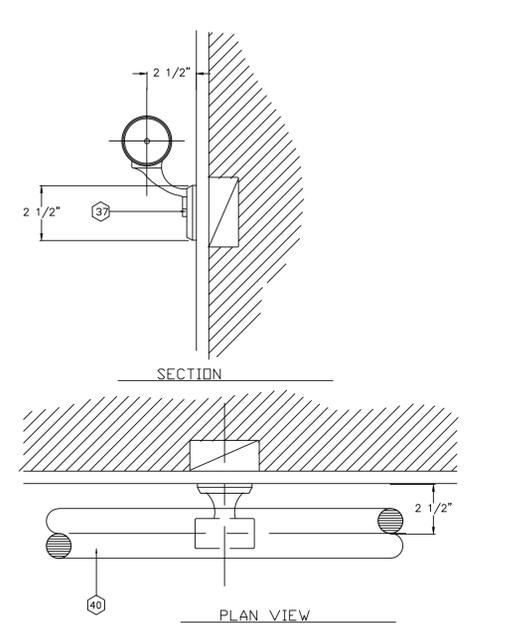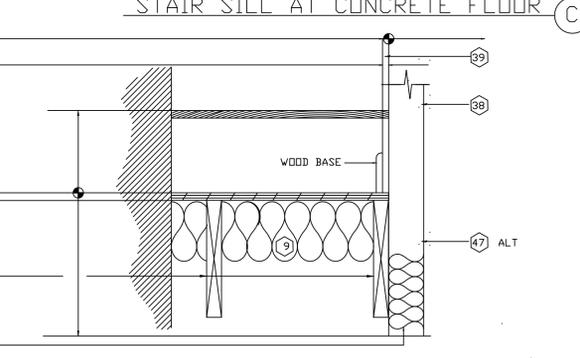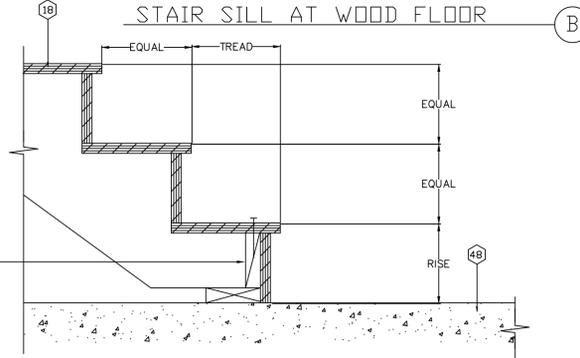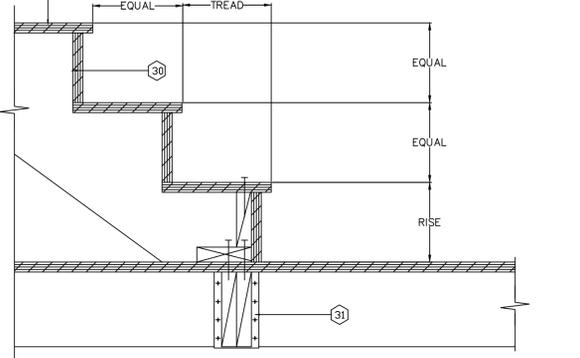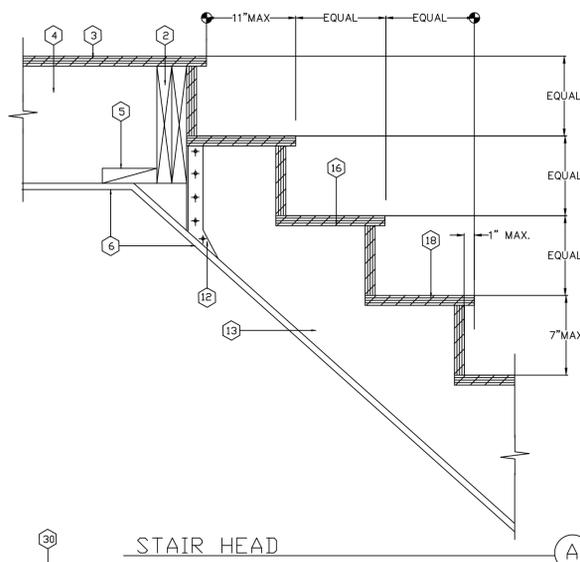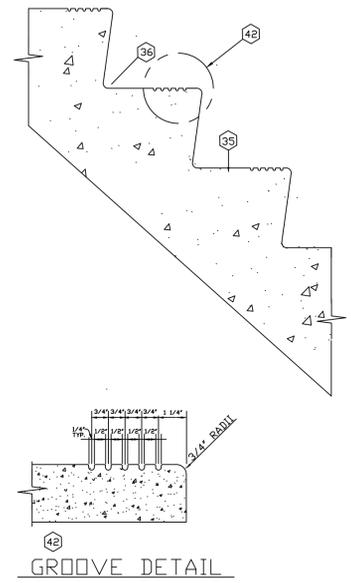

STAIR NOTES

1. HANDRAILS
 - A. PROVIDE HANDRAIL - MINIMUM ONE SIDE
 - B. HEIGHT OF RAILING ABOVE TREADS - 34" (34" MIN. - 38" MAX.)
 - C. EXTEND HANDRAILS 12" NOSING OF TOP TREAD AND 12" PLUS TREAD WIDTH BEYOND THE BOTTOM NOSING.
 - D. RETURN AND TERMINATE ENDS OF HANDRAILS TO WALL OR POST.
 - E. PROVIDE 1 1/2" CLEAR BETWEEN HANDRAIL AND WALL.
 - F. CROSS-SECTIONAL DIMENSION HAND GRIP PORTION OF HANDRAILS: 1 1/4" MINIMUM.
2. TREADS
 - A. ALL TREADS SURFACES ARE TO BE SLIP RESISTANT
 - B. ALL EXPOSED EDGES OF TREADS ARE TO BE SMOOTH, ROUNDED OR CHAMFERED. NO ABRUPT EDGES AT LOWER FRONT EDGE OF NOSING
3. NOSING
 - A. NOSING PROJECTION PAST FACE OR RISER BELOW TO BE 1 1/4" MAXIMUM.
4. RISERS
 - A. SUFFICIENTLY SOLID TO PREVENT PASSAGE OF OBJECTS LARGER THAN 1/4".
5. Risers. The riser height shall be not more than 7 3/4 inches. The greatest riser height within any flight of stairs shall not exceed the smallest by more than 3/8 inch. At open risers, openings located more than 30 inches, as measured vertically, to the floor or grade below do not permit the passage of a 4-inch-diameter sphere.

6. Tread Depth: The tread depth must not be less than 10 inches (254 mm) and the maximum variation in tread depth between flights must not exceed 3/8 inch (1.6 mm).

7. MINIMUM HEADROOM CLEARANCE MEASURED VERTICALLY FROM THE PLANE OF THE CEILING FINISH TANGENT TO THE TREAD NOSING AT THE STAIRWELL: 6'-8" MINIMUM CLEAR

8. MAXIMUM VERTICAL DISTANCE BETWEEN STAIRWAY LANDINGS: 12'-7"

9. STAIR LANDINGS:

- A. STAIR LANDINGS SHALL BE THE SAME WIDTH AND DEPTH AS THE STAIR IT SERVES WITH MINIMUM DIMENSIONS OF 36" EACH WAY.
- B. PROVIDE HANDRAIL AT STAIRS AND 36" HIGH GUARD RAIL (42" MINIMUM IF OCCUPANCY LOAD IS HIGHER THAN 100#) AT STAIR LAN WITH CLEAR SPACE BETWEEN BALLUSTERS AND HORIZONTAL TOP AT 4" MIN. CLR. TYPICAL


10. SEE INTERIOR FINISH SCHEDULE DETAILS AT PLANS FOR STAIR FINISHES.

11. HANDICAPPED COMPLIANCE:

- A. MARK WITH A 2" WIDE STRIPE OF CONTRASTING COLOR PARALLEL TO AND NOT MORE THAN 1" FROM THE NOSE OF THE STEP OR LANDING, THE UPPER APPROACH AND LOWER TREAD OF EACH STAIR. USE A SLIP RESISTANT MATERIAL FOR THE STRIPE AT EACH NOSING AND LANDING.

12. ENCLOSED USABLE SPACE UNDER STAIR

- A. SHALL BE PROTECTED WITH ONE-HOUR FIRE RESISTIVE PROTE

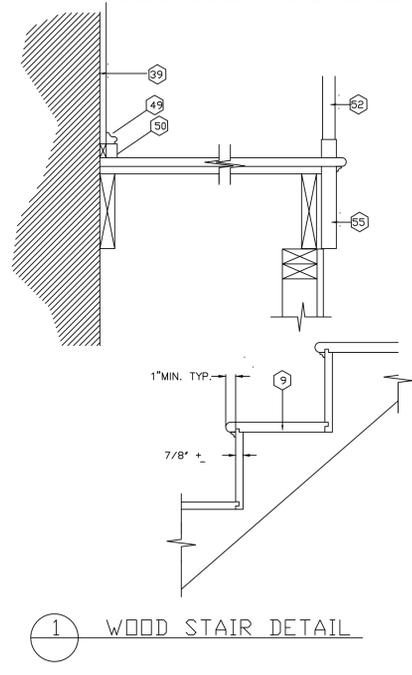

5 EXTERIOR CONCRETE STAIR DETAIL

4 WOOD STAIR DETAIL

2 STAIR FINISH DETAIL

1 WOOD STAIR DETAIL

PRIVADA AT THE MISSIONS
 LOT -9 2509 MISSION RD SAN ANTONIO TX



LIS ARCHITECTURAL DESIGN SERVICES
 (210) 385-9055
 LISARCHITECTURALDESIGNSERVICES.COM

LOT 8

DATE
 2/2/2026


REVISION HISTORY	
Mark	Note

The Designer, Brenda Perez or Lis Architectural Design Services, assume no liability for any structure built from these plans. Before construction, the purchaser, builder or contractor must verify all dimensions, verify compliance with all building codes and incorporate site conditions. Only a qualified designer, architect or structural engineer should be permitted to alter these plans with consent of owner.

sheet
A.7

GENERAL ELECTRICAL NOTES

- ALL ELECTRICAL WORK TO BE INSTALLED BY CLASS LICENSED ELECTRICAL CONTRACTOR AND COMPLY WITH LOCAL, STATE AND NEC.
- BREAKER BOX TO BE VERIFIED BY ELECTRICIAN AND COMPLY WITH CODE REQUIREMENTS.
- ALL PLUGS AND SMOKE DETECTORS PER IRC CODES AND WHERE LOCATED ON PLAN. ALL SMOKE DETECTORS SHOULD BE IN AN AREA ACCESSIBLE BY 16' EXTENSION LADDER OR 6' STEP LADDER. SMOKE DETECTORS MUST BE MIN. OF 30" FROM ANY R.A.G. INCLUDING ADJACENT ROOMS. DETECTORS SHALL BE INSTALLED INTERCONNECTED SO THAT THE ACTUATION OF ONE WILL ACTIVATE ALL OTHERS.
- COACH LIGHTS TO BE MOUNTED PER ELEVATION.
- PRE-WIRE LOW VOLTAGE FOR O.H. DOOR OPENER - LOW VOLTAGE AT 8" A.F.F. ON EACH SIDE OF O.H. DOOR. OPENER BUTTONS TO BE 5'-0" A.F.F.
- DOORBELL BUTTON TO BE @ 42" A.F.F. WHERE APPLICABLE AND LOCATION DENOTED ON PLAN.
- DOORBELL CHIMES AND SECURITY SIREN BOX TO BE 8" FROM CEILING TO BOTTOM OF BOX.
- MICROWAVE/VENTHOOD PLUG TO BE LOCATED AT 84" A.F.F. (IF OVER COOKTOP). MICROWAVE AND REFRIGERATOR AND FREEZER OUTLETS TO BE DEDICATED 20 AMP. VERIFY MOUNTING HEIGHT OF VENT HOOD.
- BATH VANITY LIGHT FIXTURE BLOCKING TO BE AT 86" A.F.F. (TO BOTTOM OF BOX) U.N.O.
- OWNER BATH VANITY LIGHT BOXES TO BE AT 89" A.F.F. (TO BOTTOM OF BOX) U.N.O.
- INSTALL GFCI PLUGS AT ALL SINK VANITIES; SIDEWALL PLUG TO BE 8" FROM BACK WALL. BATH VANITY PLUGS TO BE 42" A.F.F. TO BOTTOM OF BOX.
- INSTALL GFCI PLUGS AT ALL SINK VANITIES AND AT KITCHEN COUNTERTOPS.
- KITCHEN COUNTERTOP PLUGS AND SWITCHES TO BE 42" A.F.F. (TO BOTTOM OF BOX)
- GARBAGE DISPOSAL TO HAVE PLUG (IF UTILIZED)
- SECURITY KEYPADS TO BE LOCATED ABOVE SWITCHES, PER PLAN. SECURITY PANEL AT 67" A.F.F. TO TOP OF BOX, STRUCTURED WIRING PANEL TO BE 53" A.F.F. TO TOP OF BOX.
- TELEPHONE, TV AND PLUG BELOW KNEE SPACE TO BE AT 13" A.F.F. TO TOP OF BOX
- DESK/TV CABINET 110V OUTLET ABOVE COUNTER TO BE 36" A.F.F. TO BOTTOM OF BOX (BOX TO BE VERTICAL)
- WALK IN CLOSET LIGHT TO BE 18" FROM SHELF.
- NO WIRES TO BE RUN OVER ATTIC CATWALKS.
- LIGHT IN ATTIC AT HVAC WORK PLATFORM AND WH PLATFORM (PER IRC CODES) TO BE SWITCHED IN ATTIC, ACCESSIBLE FROM ATTIC LADDER. IF LOCATION REQUIRES PROVIDE 2 LIGHTS; 1 AT UNIT AND 1 AT ACCESS OPENING (ON ONE SWITCH)
- INSTALL SPLIT OUTLET BELOW SINK FOR DISPOSAL AND DISHWASHER AND CENTER AT SINK BASE, SWITCH FOR DISPOSAL ONLY.
- 110V SERVICE OUTLET IN ATTIC AT HVAC AND WH PLATFORM
- BLOCK AND WIRE FOR ALL CEILING FANS AND LIGHTS IN ALL SECONDARY BEDROOMS, MASTER BEDROOM AND FAMILY ROOM. LIVING ROOMS FOR LIGHT AND FAN (2-GANG SWITCH)
- 110V OUTLETS AT ISLAND TO BE 25" A.F.F. TO BOTTOM OF BOX. PLUG TO BE HORIZONTAL.
- HVAC CONTRACTOR TO SUPPLY AND INSTALL ALL EXHAUST FANS. ELECTRICIAN TO WIRE. INSTALL 16" FROM BACK OF BOX TO WALL WHEN POSSIBLE AND CENTER OVER DRYER & TOILET.
- THERMOSTAT TO BE LOCATED 60" A.F.F. TO CENTER OF BOX. LOCATIONS PER HVAC CONTRACTOR.
- CEILING FANS INSTALLED BY THE ELECTRICAL CONTRACTOR.
- IF UTILIZED, PROVIDE POWER FOR WATER SOFTENER OUTLET PER MANUFACTURER.
- PLUG FOR SPRINKLER SYSTEM AT 84" A.F.F. IN GARAGE.
- EXTERIOR GFI AT AC CONDENSER SHOULD BE LOCATED NEXT TO, AND AT THE SAME HEIGHT, AS THE DISCONNECT.
- DRYER VENT TO SIT ON BOTTOM PLATE.
- INSTALL DRYER VENT BOX 1'-4" CENTERED, FROM SIDE WALL FACE OF STUD WHERE DRYER IS LOCATED ON PLAN.
- DOORBELL TRANSFORMER TO BE LOCATED BEHIND CHIMES IN J-BOX.
- SECURITY MOTION DETECTOR PER PROVIDER. TO BE MOUNTED @ 7'-6" A.F.F.

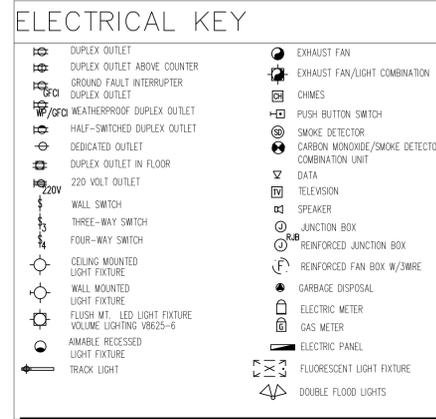

ARC FAULT CIRCUIT NOTE:


PROVIDE ARC FAULT CIRCUIT INTERRUPTER (AFCI) PROTECTION AT ALL LIVING AREAS PER NEC REQUIREMENTS

SWITCH AND RECEPTACLE HEIGHTS

SWITCHES: . . . 42" TO BOTTOM
 OUTLETS: . . . 14" TO BOTTOM
 TELEPHONE: . . . 14" (UNLESS ABV COUNTERTOP)
 TELEVISION: . . . 14" U.N.O.


SMOKE/CARBON MONOXIDE DETECTOR NOTE:

ALL SMOKE DETECTORS ARE HARDWIRED WITH BATTERY BACKUP AND INTER-CONNECTED. COMBINATION SMOKE/CARBON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORY. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, FIREPLACE, OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.

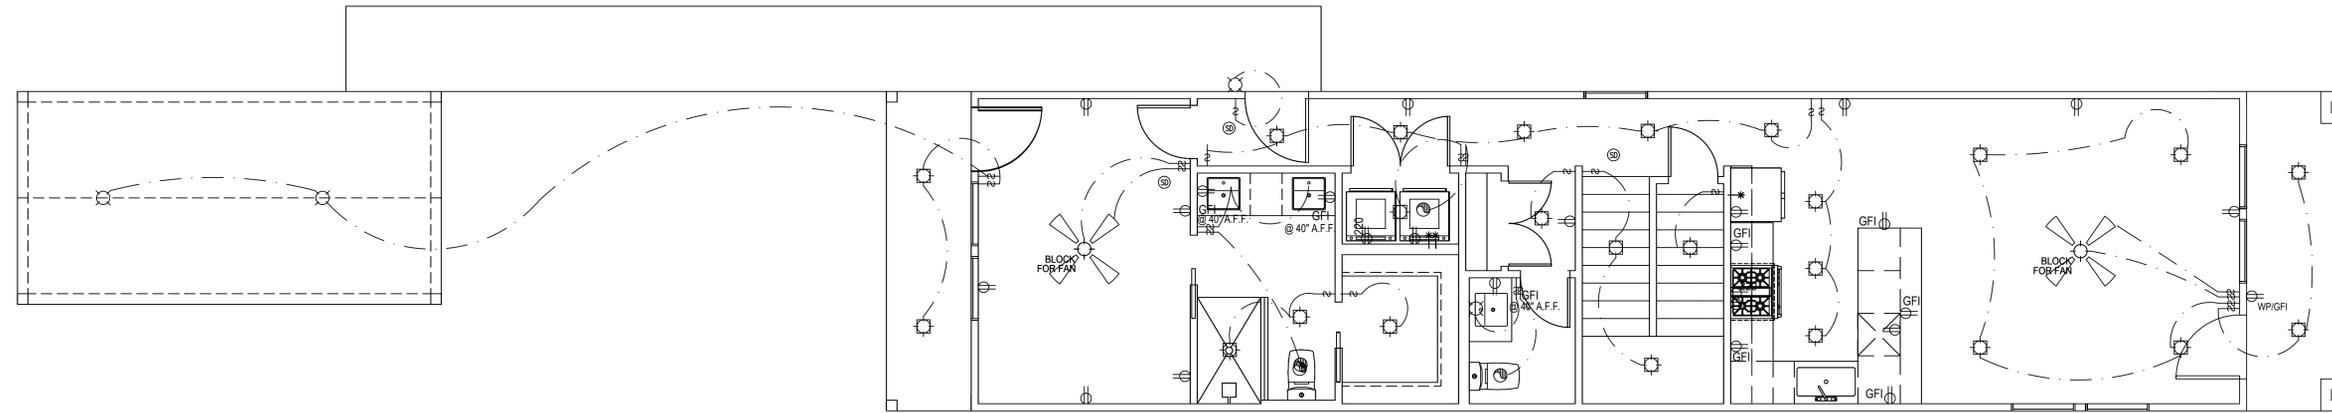

FIRST FLOOR ELECTRICAL PLAN

scale : 1/4" = 1'-0"

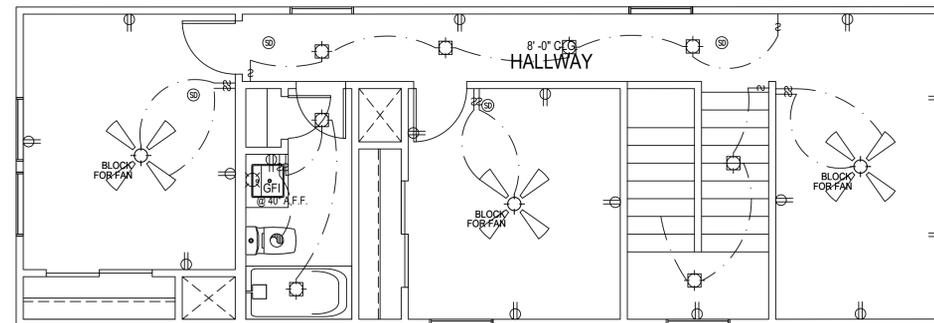

SECOND FLOOR ELECTRICAL PLAN

scale : 1/4" = 1'-0"

PRIVADA AT THE MISSIONS
LOT -8 2509 MISSION RD SAN ANTONIO TX



LIS ARCHITECTURAL DESIGN SERVICES
 (210) 385-1955
 USARCHITECTURALDESIGNSERVICES.COM

LOT 8

DATE
2/2/2026

REVISION HISTORY
 Mark Note

REVISION HISTORY	Mark	Note

The Designer, Brendalis Perez or Lis Architectural Design Services, assume no liability for any structure built from these plans. Before construction, the purchaser, builder or contractor must verify all dimensions, verify compliance with all building codes and incorporate site conditions. Only a qualified designer, architect or structural engineer should be permitted to alter these plans with consent of owner.

sheet

E.1