


# Window Schedule with Images

| Image | Mark | | Nominal Size | | Window Style | | | | | Sill | Glass | Frame Details | | | Openings | | | | | Window Data | | Access. | COMM. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | O.A. Width | O.A. Height | Configuration | | Shape | Top Shape | Transom Sash | Muntin Pattern | | | Head Detail | Jamb Detail | Sill Detail | Egress Win | RO Width | RO Height | Mas O Width | Mas O Height | Mfr | Model No. | | |
|  | W | 01 | 5'6 1/2" | 10'0" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | Low E Insulated | | | | FALSE | 5'6 1/2" | 10'0" | 6'0" | 10'0" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 02 | 4'0" | 10'0" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | Low E Insulated | | | | FALSE | 4'0" | 10'0" | 4'0" | 10'0" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 03 | 3'3" | 10'2" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | 3/4" INSULATED | | | | FALSE | 3'3" | 10'2" | 3'4" | 10'8" | | | | |
| | W | 06 | 4'0" | 8'0" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | 3/4" INSULATED | | | | FALSE | 4'0" | 8'0" | 4'0" | 8'0" | Colonial Iron Doors or Equal | | | |
| | W | 06 | 4'0" | 8'0" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | Low E Insulated | | | | FALSE | 4'0" | 8'0" | 4'0" | 8'0" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 07 | 3'5" | 7'5 1/2" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | 3/4" INSULATED | | | | FALSE | 3'5" | 7'5 1/2" | 3'5" | 7'5 1/2" | Colonial Iron Doors or Equal | | | |
|  | W | 08 | 4'0" | 7'5 1/2" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | Low E Insulated | | | | FALSE | 4'0" | 7'5 1/2" | 4'0" | 7'5 1/2" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 10 | 4'0" | 7'8" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | Low E Insulated | | | | FALSE | 4'0" | 7'8" | 4'0" | 8'0" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 11 | 3'4" | 10'0" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | Low E Insulated | | | | FALSE | 3'4" | 10'0" | 3'4" | 10'0" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 5 | 4'5 1/2" | 11'0" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | **Low E Insulated** | | | | TRUE | 4'5 1/2" | 11'0" | 4'5 1/2" | 11'0" | MARVIN Essential Ultrex Fiberglass or equal | | | |
| | W | 9 | 4'0" | 7'4 1/2" | Fixed Glass | N/A | Rectangle | Square | - | Colonial | Masonry | **Low E Insulated** | | | | TRUE | 4'0" | 7'4 1/2" | 4'0" | 7'4 1/2" | MARVIN Essential Ultrex Fiberglass or equal | | | |

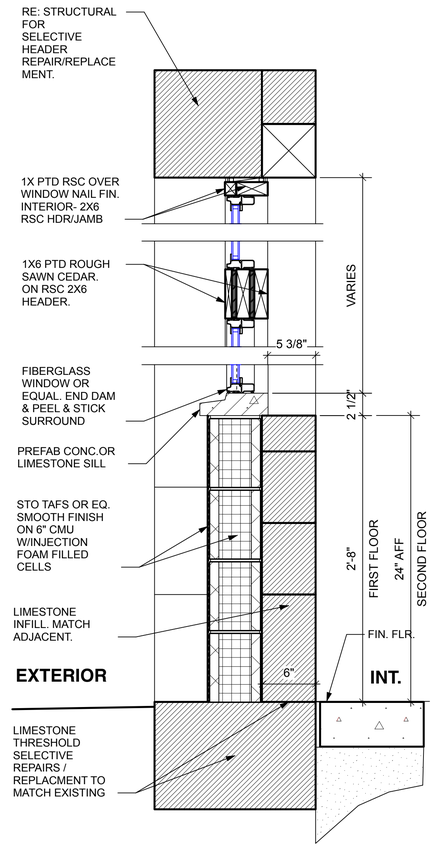


1 SECTION DETAIL - WINDOW
Scale: 1 1/2" = 1'-0"

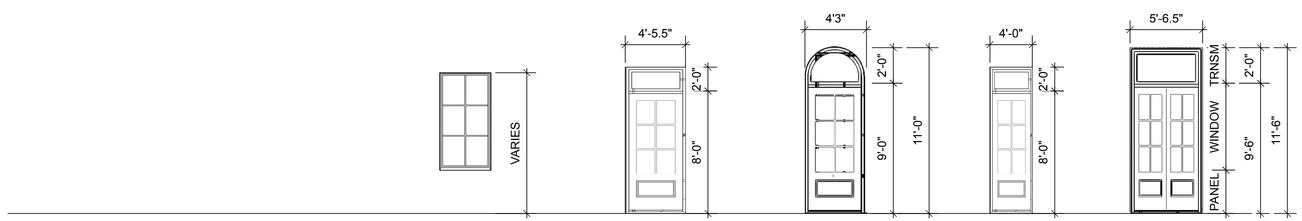


**TYPE- W03, W06, W07, WO8, WO9**
Quantity: 14 Count

**TYPE-W05**
Window Assembly
Quantity: 01 Count

**TYPE-W04**
Round Top Window Assembly
Quantity: 01 Count

**TYPE-W02**
Window Assembly
Quantity: 01 Count

**TYPE-W01**
Window Asembly
Quantity: 07 Count

## WINDOW TYPES BASIS OF DESIGN:

**MANUFACTURERS:** MARVIN ESSENTIAL ULTREX FIBERGLASS OR EQUAL.

**NOTE:** VERIFY ALL DOOR AND WINDOW SIZES IN FIELD.

**ALUM. STOREFRONT WINDOW ALTERNATE EQUAL TO:**
**A.** TYPE-W01, W02, W03, W06, W07, WO8, WO9, W10, W11
**B.** OBE (OLDCASTLE) FOR ALTERNATE ALUM. STOREFRONT WINDOW Series 3000 (2" x 4-1/2") Thermal MultiPlane from Oldcastle BuildingEnvelope. OR EQUAL.
**C.** LOW E INSULATED GLASS.

NĀTIVCRAFT
Design ⁴ Lifecycle

Project Title
**OK TOURS!!! - 701 AUSTIN ST BLDG. RENOVATION**
701 AUSTIN STREET
SAN ANTONIO, TEXAS 78215

REGISTERED ARCHITECT
EDMUND R. CARRASCO
30857
STATE OF TEXAS
7/10/26


Architect
NĀTIVCRAFT, LLC
Ph. 210-367-9910
San Antonio, Texas 78207


© 2026 NātivCraft, LLC. All rights reserved.

Consultant
STRUCTURAL - IES
MEP - RGM

| REV. | DATE | DESCRIPTION |
|---|---|---|
| 1 | 10/8/26 | REVISED WINDOWS |

| NO. | DATE | ISSUE NOTE |
|---|---|---|
| D | 7/10/26 | 100% CD IFP SET |
| C | 4/24/26 | 100% CD REVIEW |
| B | 3/26/26 | 95% CD REVIEW |

Project Manager: FMLOPEZ
Drawn By: Nātivcraft, LLC
Date: July 10, 2026
Reviewed By: Nātivcraft, LLC
Project ID: 25001-01

Sheet Title
WINDOW SCHEDULE

Sheet No.
A6.1