



- ### GENERAL NOTES
- SHOP DRAWINGS SIGNED AND SEALED BY A STRUCTURAL ENGINEER LICENSED IN THE STATE OF TEXAS, TO BE PROVIDED TO LANDSCAPE ARCHITECT PRIOR TO BEGINNING CONSTRUCTION ON ANY STRUCTURE OR SITE ITEM. REINFORCEMENT SHOWN IS FOR GRAPHICAL REPRESENTATION ONLY AND SHALL NOT BE CONSTRUCTED AS PART OF ANY GRADE BEAMS, PIERS, CAPS, SEAT WALLS, CONNECTIONS, ETC. SHOP DRAWINGS SHALL INDICATE ALL MEMBERS, CONNECTIONS, WELDS, FASTENINGS, MATERIALS, WIND LOADING CAPACITY, ETC. PRIOR TO FABRICATION AND INSTALLATION.
 - ALL PROPOSED NEW CONCRETE SHALL BE MINIMUM 3000 PSI RATED
 - ALL CONCRETE SAWCUTS TO BE A MIN. WIDTH OF 1/4" AND A MIN. DEPTH OF 3/8".
 - CONTRACTOR SHALL PROVIDE #3 REBAR AT 16" ON CENTER EACH WAY
 - 1/2" EXPANSION JOINTS SHALL BE PROVIDED AT 25' MAXIMUM SPACING AND FILLED WITH REDWOOD EXPANSION JOINT AND SELF LEVELING CAULK. ALL EXPANSION JOINTS SHALL HAVE #4 REBAR DOWELS, LUBRICATED, 16" LONG, AT 12" CENTERS, 6" FROM THE EDGE
 - 1/2" BITUMINOUS EXPANSION JOINT FILLER SHALL BE PROVIDED WHERE PROPOSED NEW WALKS ABUT EXISTING SIDEWALKS, AND AT ALL GRADE CHANGES


5 CONCRETE CREEK CROSSING
SCALE: 3/4"=1'-0" SECTION

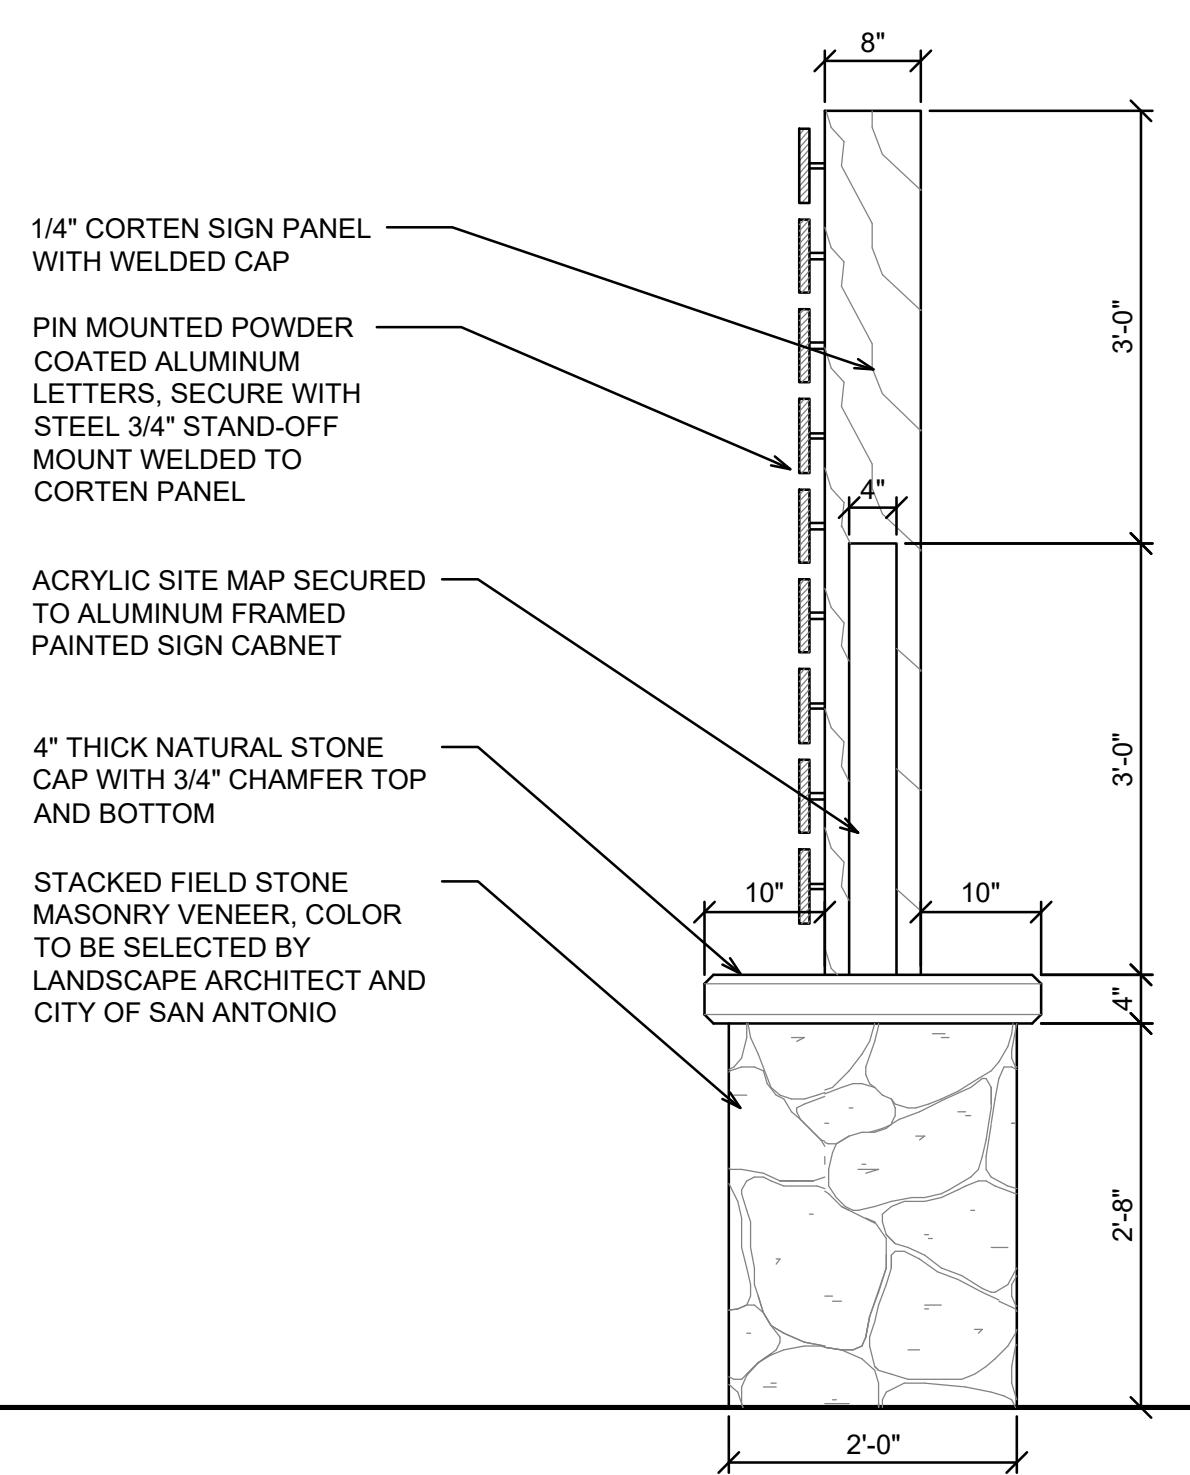


4 MONUMENT SIGN-SIDE
SCALE: 3/4"=1'-0" ELEVATION

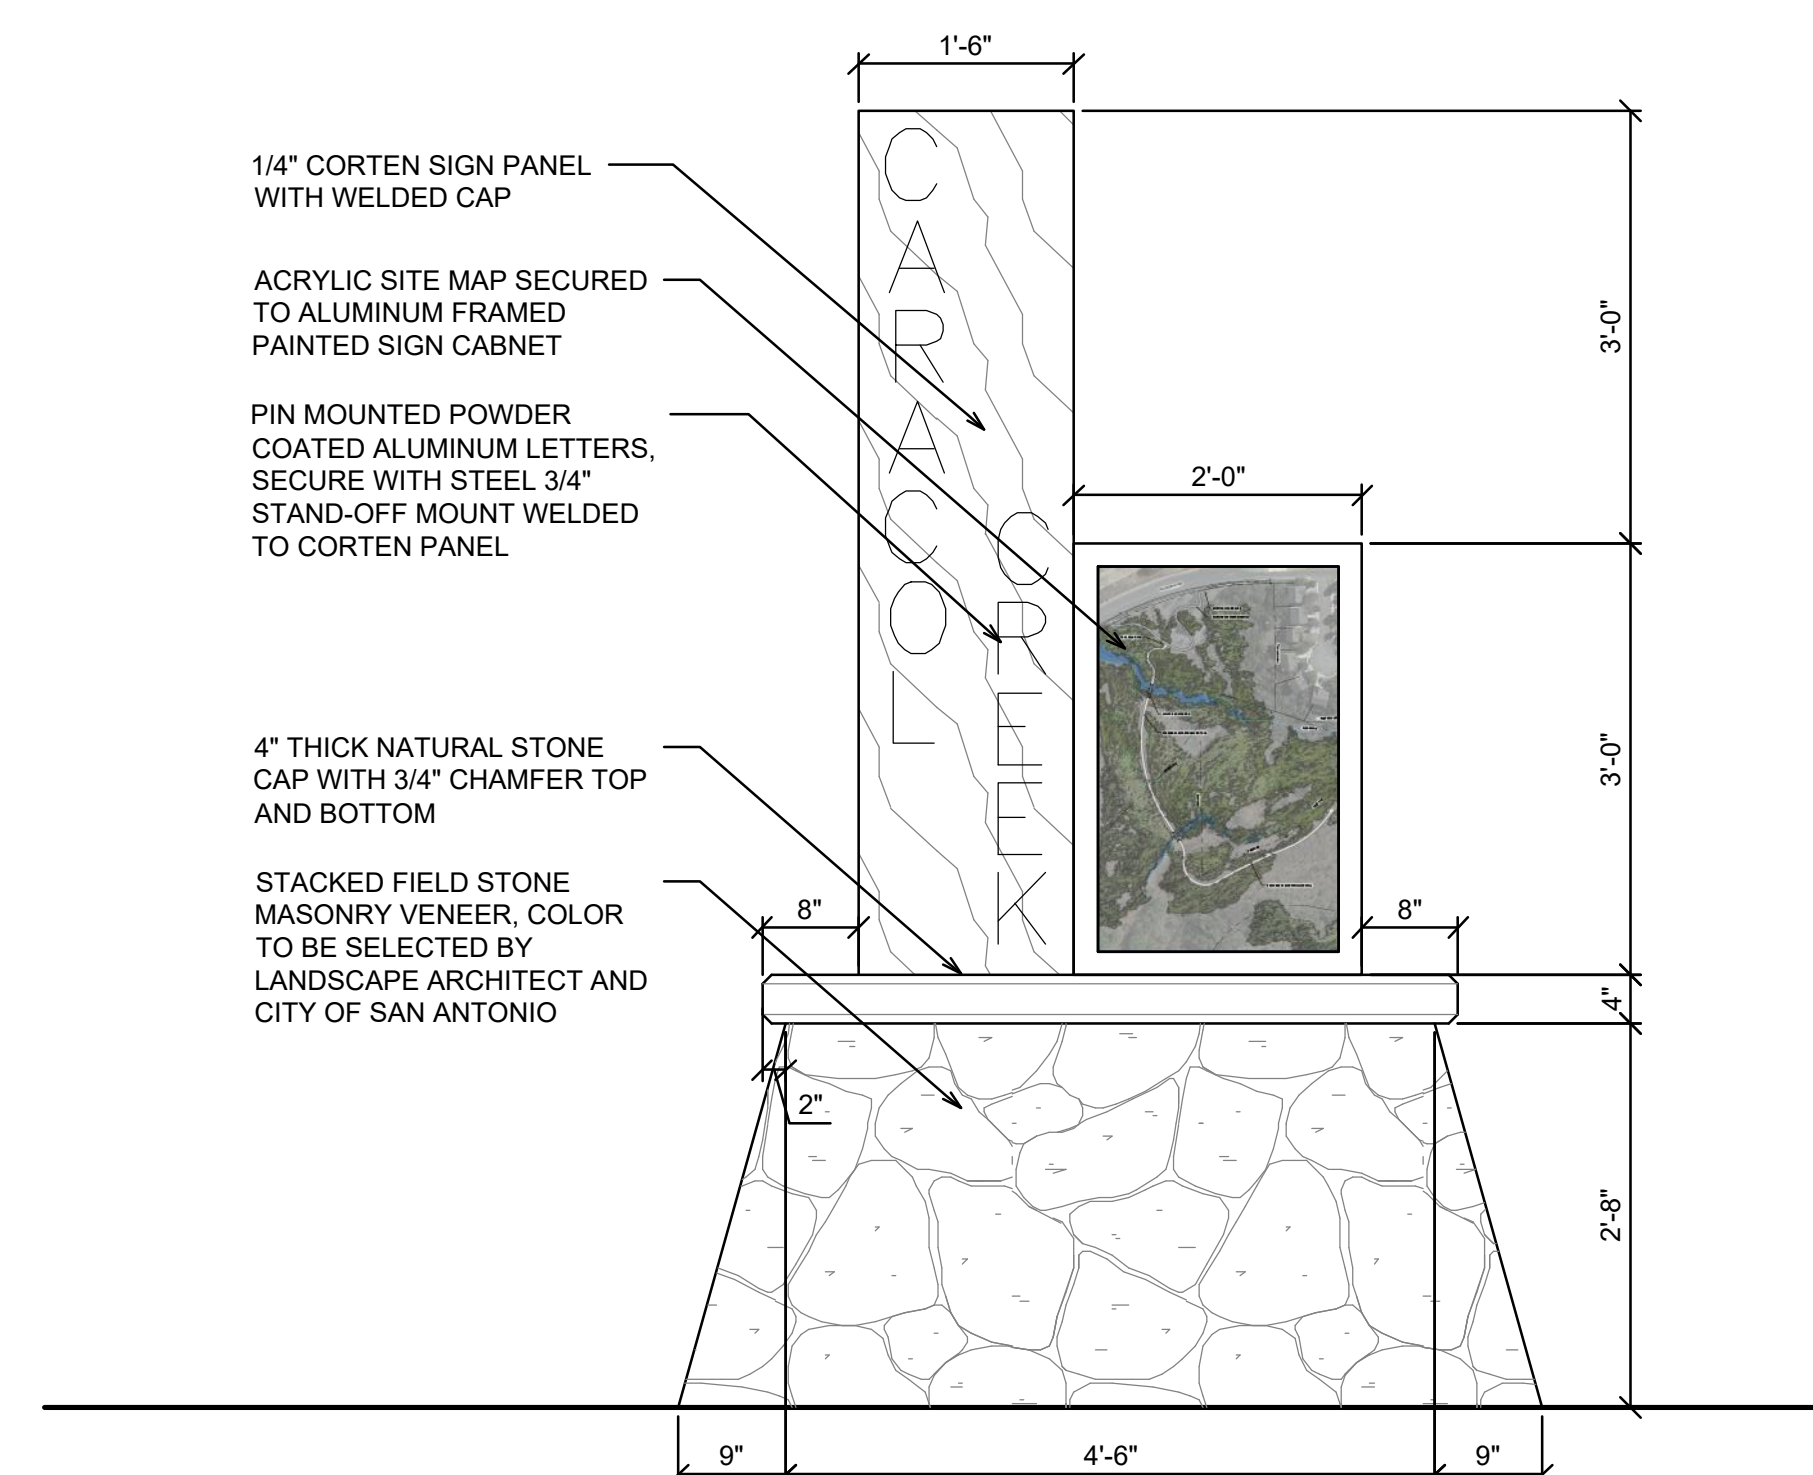

3 MONUMENT SIGN-FRONT
SCALE: 3/4"=1'-0" ELEVATION

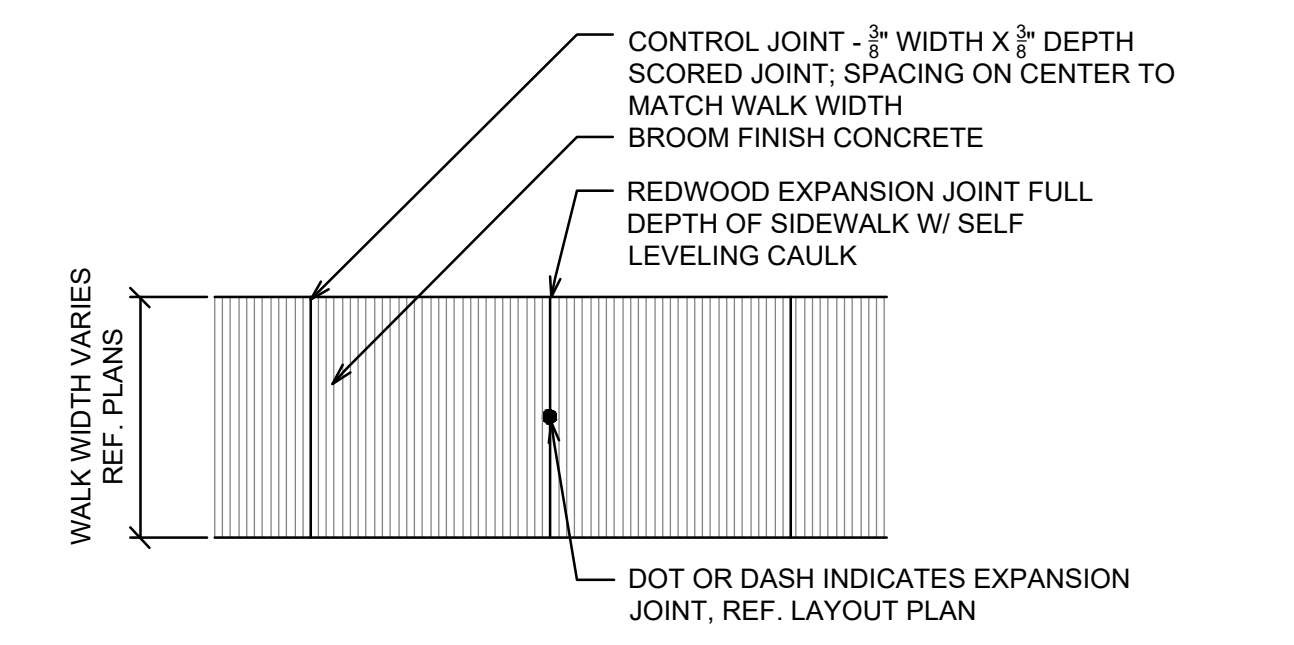

2 CONCRETE FINISH
NOT TO SCALE PLAN

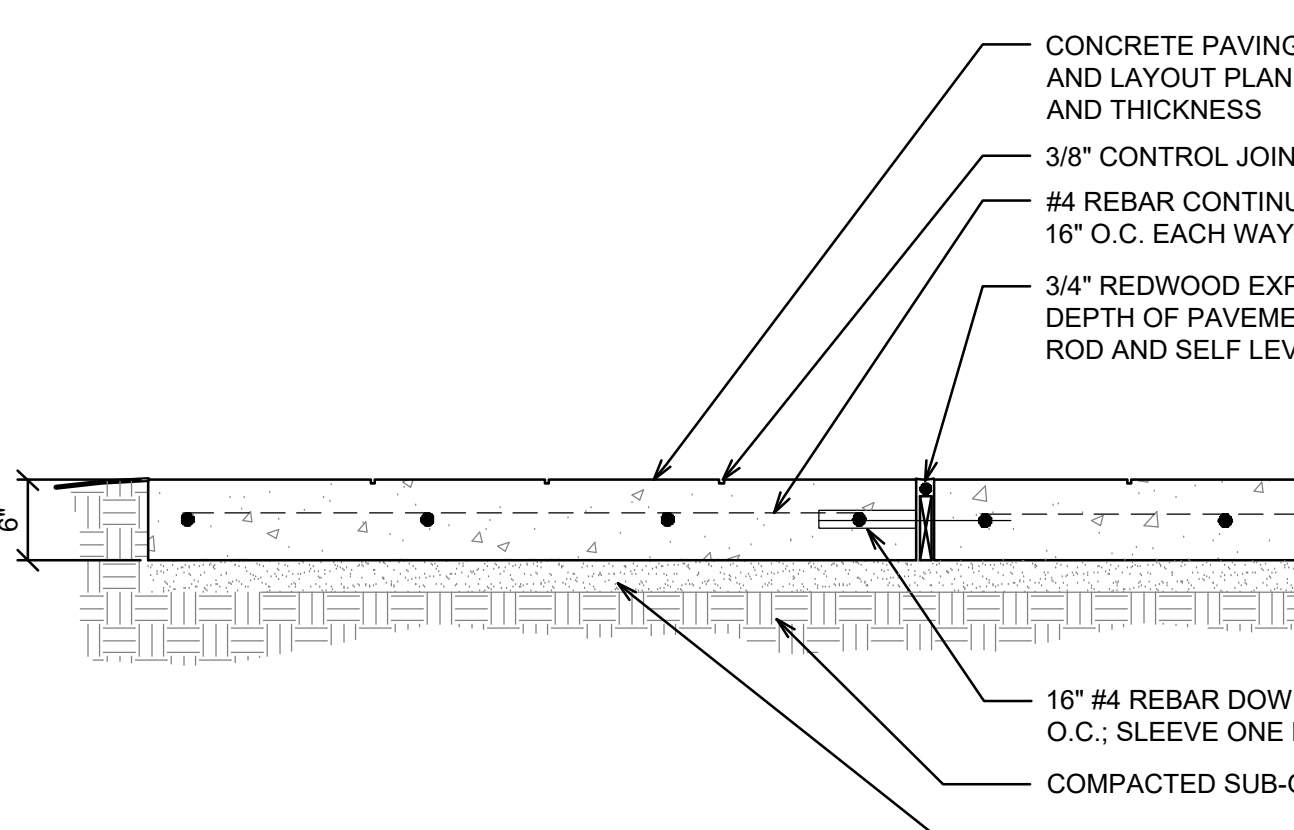

1 CONCRETE PAVING
SCALE: 1"=1'-0" SECTION